


### Neoprene Caps


- Slip on head of hex-head spindles
- Hardness: 60-70 Shore A
- Temperature range:  
-40°C to 105°C [-40°F to 220°F]

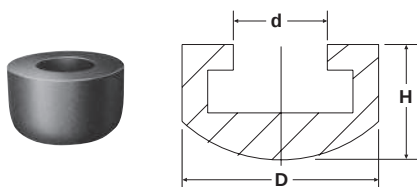

| Part No. | D              | d              | H              | For Spindle Diameter |
|----------|----------------|----------------|----------------|----------------------|
| 215119   | [0.63]<br>16   | [0.25]<br>6,35 | [0.44]<br>11,1 | M6 or 1/4            |
| 225119   | [0.75]<br>19,1 | [0.31]<br>8    | [0.50]<br>12,7 | M8 or 5/16           |
| 235119   | [0.88]<br>22,3 | [0.38]<br>9,7  | [0.53]<br>13,5 | 3/8                  |

### Special Neoprene Caps


- Slip on threaded spindle rod
- Hardness: 60-70 Shore A
- Temperature range:  
-40°C to 10~°C [-40°F to 220°F]

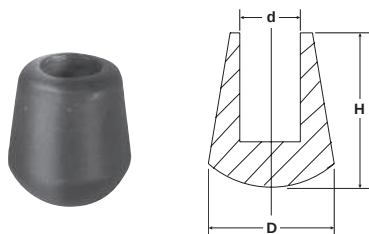

| Part No. | D              | d             | H              | For Spindle Diameter |
|----------|----------------|---------------|----------------|----------------------|
| 424107   | [0.44]<br>11,1 | [0.22]<br>5,6 | [0.44]<br>11,1 | M6 or 1/4            |
| 235110   | [0.72]<br>18,3 | [0.34]<br>8,6 | [0.88]<br>22,3 | M10 or 3/8           |

### Polyurethane Caps


- Flat tip, internally threaded
- Hardness: 80 Shore A
- Temperature range:  
-70°C to 95°C [-90°F to 200°F]

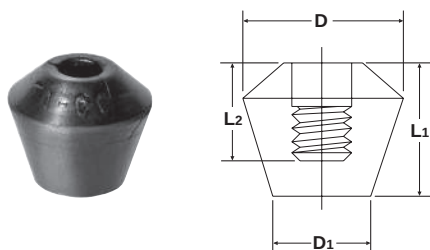

| Part No. | D              | D1             | L1             | L2             | For Spindle Diameter |
|----------|----------------|----------------|----------------|----------------|----------------------|
| 215219   |                |                |                |                | 1/4-20               |
| 215219-M | [0.79]<br>20   | [0.50]<br>12,7 | [0.69]<br>17,5 | [0.50]<br>12,7 | M6 x 1.0             |
| 225219   |                |                |                |                | 5/16-18              |
| 225219-M |                |                |                |                | M8 x 1.25            |
| 235219   | [0.81]<br>20,5 | [0.63]<br>16   | [0.88]<br>22,3 | [0.63]<br>16   | 3/8-16               |
| 235219-M |                |                |                |                | M10 x 1.5            |

### Polyurethane Caps – Cone-tip

- Cone tip, internally threaded
- Hardness: 80 Shore A
- Temperature range:  
-70°C to 95°C [-90°F to 200°F]

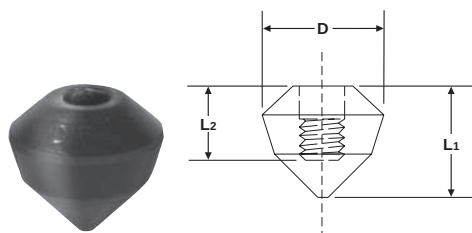

| Part No. | D              | L1             | L2             | For Spindle Diameter |
|----------|----------------|----------------|----------------|----------------------|
| 215319   | [0.81]<br>20,5 | [0.75]<br>19,1 | [0.50]<br>12,7 | 1/4                  |
| 225319   |                |                |                | 5/16                 |
| 235319   |                | [0.94]<br>23,9 | [0.63]<br>16   | 3/8                  |